




WIFI

APP Quick Start Guide Solar Camera




WIFI




Please read the instructions carefully before using the product and keep it properly. As the APP version is updated, there will be changes. This manual is for reference.

1. Packing list (please refer to the actual product)

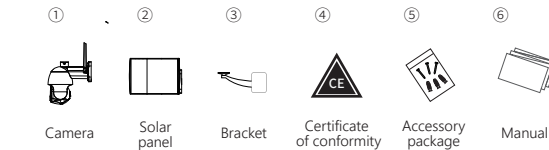

2. Schematic diagram of interface description

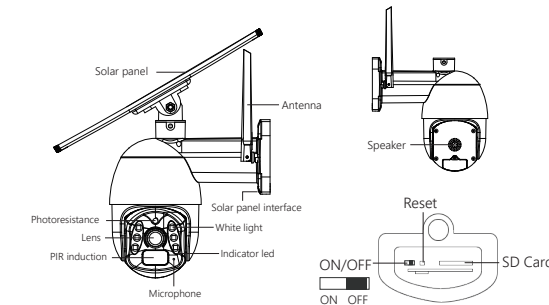


3. Download and install the APP

1 Scan the QR code below and click to install or open the mobile app market to search for Tuya Smart.



4. Sign up for Login Account

1 Enter your mobile phone number or email address.

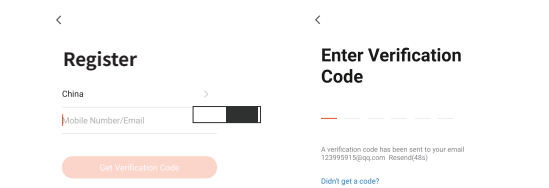

5. Device connection

Note: This device has built-in battery pack. For the first use, please use the DC 5V2A with USB cable to charge for 10 hours.

1. **Button:** *On the back of the camera lens

ON/OFF button : **[ON OFF]**
Reset button : In the boot state, long press for 5 seconds to reset.

2. **Indicator light:**


The red light keeps flashing : Wait to connect to the network.
The red lights always on : In error state, please restart.
The red light keeps flashing : The network connection is in progress.
The blue lights always on : The device is successfully connected.

3. **Device connection**


- 1 If recording is needed, please insert the SD card(the chip of SD card is facing the USB interface) and wait for a beep and the red light flashing.
- 2 Power on and wait for the beep and the red light flashing.
- 3 Please open the APP homepage to connect to the device; as follows:

6. Equipment instructions

1 Click on "+".

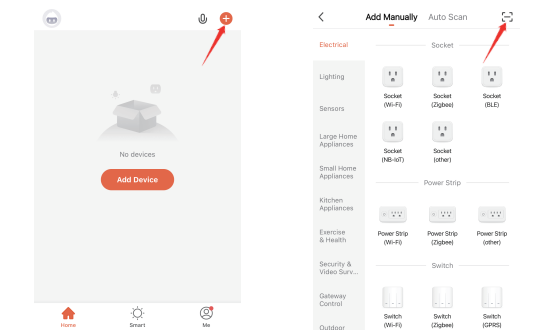


2 Scan the QR code on the device.

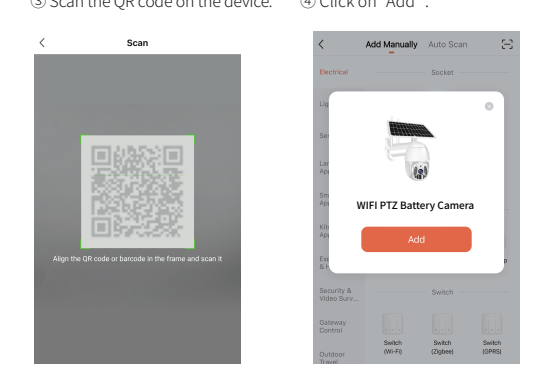


7. Matters needing attention

1 Click on "Next".

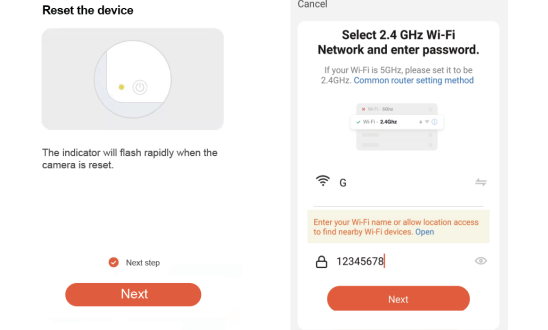


2 Enter WiFi account & password. Then click "Next".

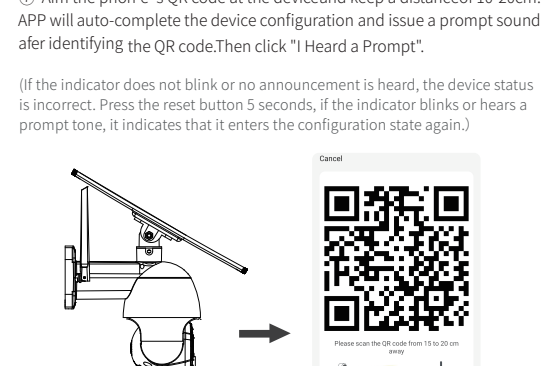


8. Troubleshooting

1 The device is being added;

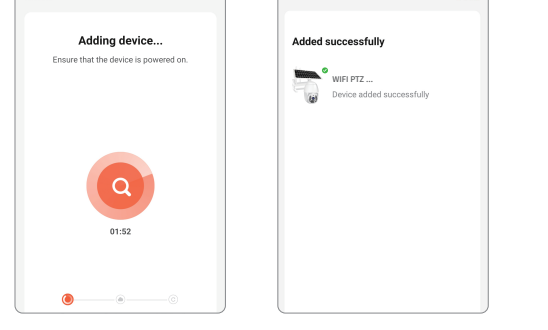


2 The device is connected successfully.

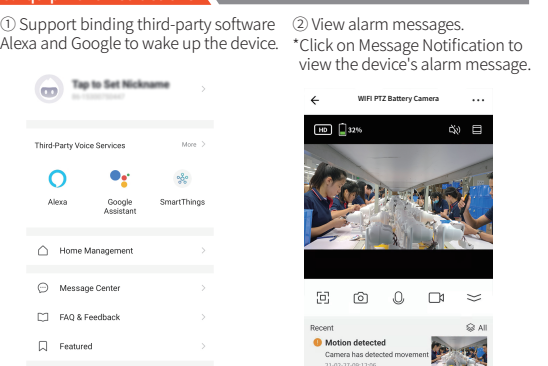

9. Common Problems

1 PTZ Control.

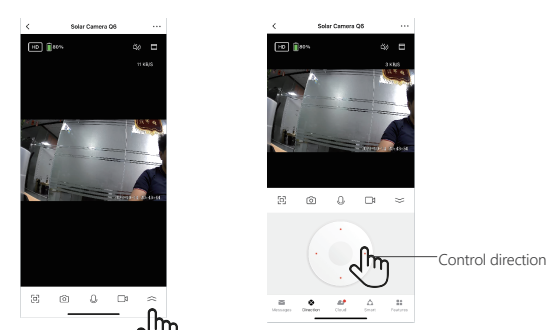

10. Troubleshooting

1 PIR is sensitive to cold and hot disturbance, points should be noted during installation:

- *Avoid placing the device in places where the air is churning. For example: air conditioning outlet, equipment cooling outlet, fan surrounding, curtain nearby, etc.
- * Do not install the device directly in front of the glass or mirror.
- * The recommended installation height of the device is about 2.5m-3m.
- * Do not invert the device.

2 The device supports battery power, and the battery's service time is affected by the wake-up time and frequency of the device. So the human detection function is suggested to turn off or set the device to low sensitivity when used in a crowded environment, so as to reduce the wake-up times of the device and extend the application time. When the device is low in power, please charge it in time. If the battery is underpowered for a long time, it may cause battery failure.

3 During the installation of the device, please ensure that the WIFI network signal is stable at the installation location, especially outdoors. Please check whether the WIFI is covered. If the WIFI signal is weak, a WIFI router should be added to improve the signal.

4 The device is a low-power intelligent product, which can support APP remote wake up, PIR human detection wake up, button wake up. Each time the wake-up device works, it will automatically enter the sleep state after a short time.

5 To ensure that the device can work normally, please first use the original DC 5V2A charger with USB cable to charge for 10 hours. Do not use a mobile power supply to charge, otherwise it is very likely to cause a short circuit.

6 The device supports WiFi 2.4GHz but does not support WiFi 5GHz.

11. Troubleshooting

1 Network allocation failed:

- *Check if the camera is in the configuration state.
- *Please make sure that the phone, camera and router are close enough.
- *Note that this camera does not support 5GHz routers.
- *Check whether the router name and password are correct.

2 The device is offline:

- *Check the internet connection of the router.
- *Check the connection between the router and the camera. If you change the router or modify the WIFI password, you need to reset the camera and reconfigure the network.
- *Check if the camera battery is exhausted, you can try to plug in the USB power source and try again.

3 Unable to preview:

- *The server may be congested, you can try to restart the APP and try again.

4 No news push:

- *Please make sure that the APP has notification permissions.

*Please make sure to turn on the alert message button in the APP personal center settings.

*Please make sure the PIR switch in the camera settings is turned on.

5 No video files:

- *Please insert the SD card before powering on.

*Please make sure that the PIR switch of the camera is turned on.

*Please make sure that the camera recording switch is turned on.

*Please check whether the SD card status in the APP device is normal, if it is abnormal, please try to format the SD card.

12. Common Problems

Q: Why does the battery drain so fast?

A: Frequent triggering of the human detection function in a crowded environment can cause the device to work for a long time and consume power easily. Please try to lower the PIR sensitivity setting; Long time to view video playback file, easy to consume power; Check whether the device signal is stable. If the network is not normal, the device may wake up multiple times and consume power easily. Please try to change the position of the device or change the SIM operator.

Q: How can I confirm that the camera is connected properly?

A: Please try to actively trigger PIR, wait for 3 seconds, the blue light is on, indicating that the device is connected properly.